



**PET**  
**Pile Echo Tester**  
Advanced, Friendly, Robust

**Product Data Sheet**



# Other Piletest Systems

**CHUM** ·  
Cross Hole Ultrasonic Monitor ..... 10

CHUM 3DI (Tomography SW) ..... 11



**PSI** ..... 12  
PSI - Parallel Seismic Instrument



**BIT** ..... 13  
BIT - Borehole Inclination tester



**Phone: +44 144 278 0919**

**Email: sales@piletest.com**

**WEB: www.piletest.com**

**Address: 18 Fouracres Walk  
Hemel Hempstead  
Herts HP3 9LB  
United Kingdom**



## PILETEST

### Company profile

At Piletest we develop and manufacture systems for quality control / quality assurance of deep foundations since 1996. Our focus has always been on quality, modularity and ease of use.

### Quality

All products undergo extensive testing, including pressure chamber, vibration table, heat oven and more, and carry a full three (3) year warranty (Excluding physical damage).

### Modularity

We focus on building pile testing systems, not on computers. Therefore, all our products connect to a standard PC, Laptop, Tablet, Smartphone via USB or Bluetooth connection. This approach minimizes your downtime and keeps you up-to-date and independent, and reduces your overall costs.

### Ease of use

We take simplicity and usability very seriously. As a result no formal training is usually required and our users usually start using our systems out-of-the-box within minutes. Our ease of use knowhow, is based on years of field work before started designing our own equipment.

### Support

It is important for us, as well as it is for you that your final product—the *test report*, is of the highest standards. To help you with this we provide free on-the-job training. We also support you with the analysis of your first projects, and can revise the next ones and comment on the following ones, until we are both satisfied with the results.



## PET - Pile Echo Tester (Model: PET Pro USB)



**Piletest's Pile Echo Tester (PET)** is a user-friendly, highly flexible solution for testing a large number of deep foundations quickly and accurately.

Requiring little-to-no training, PET is a modular, computer-independent system that attaches to the USB port of any regular notebook or a Tablet PC.

The PET system utilizes the pulse-echo method (compliant with the ASTM D5882-16 & AFNOR P160-2,4 standards). To test a pile, the user strikes it with PET's lightweight handheld hammer. The resulting signal, or reflectogram, is captured by PET's digital accelerometer. It is then transmitted to the computer to produce information about the pile's length and shape.

### Main Advantages

**Ease of use:** PET's user-friendly software makes it possible to master the system in less than a day. No additional expensive training is required

**Excellent signal quality:** PET's super low noise level enables the system to handle extremely long piles


**Computer independence:** Unlike other system based on an embedded computer (which may quickly become obsolete) PET connects to the USB port of your regular notebook computer or Tablet PC.

**Labor saving:** PET includes a number of labor-saving features such as advanced project organization; software-suggested wave velocity; Smart Trigger™ and AutoSort to reject anomalous blows; one-touch controls of scale, amplification, and filtering; plus many more features.






**Robustness:** Specially designed for testing piles, shafts and caissons in construction site environments. The PET sensor is IP67 waterproof and comes with a three (3) year warranty.

### The PET Pro USB package includes:

- A digital transducer with waterproof USB cable
- A nylon hammer, spare tips, special putty
- Testing, analysis and reporting software (unlimited number of licenses)
- Interpretation assistance package

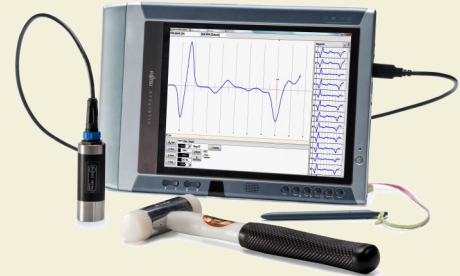

PET Pro USB with a Tablet PC  
(not included)

Pile	Depth (m)	Reflectogram	Details	Remark
S*/9	16.8m		Amp:75 Planned:16.0m Avg:5	
S*/13	15.0m		Amp:55 Planned:15.0m Avg:9	
S*/14	15.4m		Amp:55 Planned:15.0m Avg:12	
S*/15	14.0m		Amp:50 Planned:13.0m Avg:17	Anomaly at 5.1m
T/13	14.2m		Amp:120 Planned:14.0m Avg:11	

Typical output



On site

## PET Pro USB - Technical Specifications

<b>Physical</b>	<b>Housing</b>	Industrial grade transducer enclosed in a durable stainless steel and aluminum housing
	<b>Dimensions</b>	30 mm (diameter) x 90 mm (Length)
	<b>Weight</b>	120gr (Transducer) 2.3kg (Shipping)
	<b>Temperature range</b>	-20°C to +55°C (Operating) -40°C to +80°C (Storage)
	<b>Waterproofing</b>	IP67 (Protection against submersion in water)
<b>Transducer</b>	<b>Sensitivity</b>	100mV/g
	<b>Linearity</b>	Within 1%, 0 to 50g
	<b>Resonance frequency</b>	30kHz
	<b>Sampling frequency</b>	50kHz
	<b>Sampling resolution</b>	24bit
<b>Standards</b>	<b>ASTM D5882-16</b> <b>AFNOR P160-2,4</b>	Meets or exceeds
<b>Performance</b>	<b>Pile lengths</b>	2m to 80m (depending on diameter and soil profile. )
	<b>Productivity</b>	Up to 100 piles/hour by single operator under favorable conditions
	<b>Storage</b>	Unlimited
<b>Requirements</b>	<b>Computer</b> <b>(not included)</b>	Microsoft Windows 2000 / XP / Vista / Win 7 /Win 10 800x600 resolution or better USB port Recommended: Tablet PC (outdoor display)



## PET Pro USB - Ordering information

	Part number	Description	Comments
Parts	PT101	Official ISO calibration certificate for PET Pro USB system	
	PT301	Putty (HBM AK22) 1/2 Kg	100g Included in package
	PT302	Hammer	Included in package
	PT303	Replacement hammer heads for hammer (10 pcs)	Included in package (4 pcs)
	PT304	Replacement waterproof mini-USB cable for PET Pro USB	Included in package
	PT501	PET Pro USB warranty (per year)	Additional warranty beyond the included 3 years
Packages	PT001	Complete PET Pro USB package	Including: PET Pro USB sensor and waterproof cable Nylon hammer 4 X replacement hammer heads 100g putty carrying case PET software for PC and PocketPC Accelerometer calibration certificate On-line training 3 years warranty. <b>Note:</b> Computer is NOT included.

### PT001





## PET - Pile Echo Tester (Model: PET Bluetooth)

**Piletest's Pile Echo Tester (PET)** is a user-friendly, highly flexible solution for testing a large number of deep foundations quickly and accurately. Requiring little-to-no training, PET is a modular, computer-independent system that connects to any compatible computer via Bluetooth protocol. The PET system utilizes the pulse-echo method (Compliant to the ASTM D5882-16 & AFNOR P160-2,4 standards). To test a pile, the user strikes it with PET's lightweight handheld hammer. The resulting signal, or reflectogram, is captured and transferred to the computer by PET's digital accelerometer, providing real-time information about the length and shape of the pile.

### Main Advantages

**Ease of use:** PET's user-friendly software makes it possible to master the system in less than a day. No additional expensive training is required.

**Excellent signal quality:** PET's low noise level enables the system to handle extremely long piles.


**Computer independence:** PET Bluetooth connects to any existing or future computer. PET Bluetooth also connects to any Android phone or tablet. There is no dependency on an embedded computer (which may quickly become obsolete).

**Labor saving:** PET software includes a number of labor-saving features such as advanced project organization; software-suggested wave speed; Smart Trigger™ and AutoSort to reject anomalous blows; one-touch controls of scale, amplification, and filtering - plus many more features.

**Robustness:** Specially designed for testing piles, shafts and caissons in construction environments. The PET sensor is made of bullet-proof unbreakable Lexan. It is waterproof and carries a three (3) year warranty.

### The PET package includes:





- A digital transducer
- A nylon hammer, spare tips, special putty
- Testing, analysis and reporting software
- Interpretation assistance package
- Unlimited number of software licenses

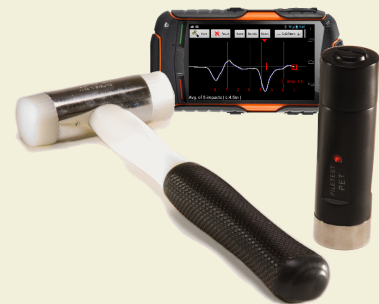

PET Bluetooth with an Android phone



The PET package

Pile	Depth (m)	Reflectogram	Details	Remark
S*/9	16.8 m		Amp:75 Planned:16.0m Avg:5	
S*/14	15.4 m		Amp:55 Planned:15.0m Avg:12	
S*/15	14.0 m		Amp:50 Planned:13.0m Avg:17	Anomaly at 5.1m
T/13	14.2 m		Amp:120 Planned:14.0m Avg:11	

Typical report

## PET Bluetooth - Technical Specifications

<b>Physical</b>	<b>Housing</b>  <b>Dimensions</b>  <b>Weight</b>  <b>Temperature range</b>  <b>Waterproofing</b>	Industrial grade transducer enclosed in a highly-durable polycarbonate plastic (Lexan)  34 mm (diameter) x 120 mm (Length)  155gr (Transducer without batteries) 3kg (Shipping)  -20°C to +55°C (Operating) -40°C to +80°C (Storage)  IP67 (Protection against complete submersion in water)
<b>Transducer</b>	<b>Sensitivity</b>  <b>Linearity</b>  <b>Resonance frequency</b>  <b>Sampling frequency</b>  <b>Sampling resolution</b>  <b>Power</b>	100mV/g  Within 1%, 0 to 50g  30kHz  50kHz  16bit  2 AAA Alkaline batteries, 3V total. Sufficient for testing approximately 300 piles
<b>Standards</b>	<b>ASTM D5882-16</b>	Meets or exceeds
<b>Performance</b>	<b>Pile lengths</b>  <b>Productivity</b>  <b>Storage</b>  <b>Range</b>	2m to 80m (dependent on diameter and soil profile. )  Up to 100 piles/hour by single operator (under favorable conditions)  Unlimited  Up to 10m between transducer and computer
<b>Requirements</b>	<b>Computer (Not included)</b>	PC/Laptop/Tablet running Windows XP/Win7/Win10 with Bluetooth hardware  — or —  Android smart-phones and tablets with Bluetooth hardware





## PET Bluetooth - Ordering information

	Part number	Description	Comments
Parts	PT301	Putty for PET Bluetooth (HBM AK22) 1/2 Kg	100g Included in package
	PT302	Hammer for PET Bluetooth	Included in package
	PT303	Replacement hammer heads for PET Bluetooth hammer (10 pcs)	Included in package (4 pcs)
	PT501	PET Bluetooth warranty (per year)	Additional warranty beyond the included 3 years
Packages	PT002	Complete PET Bluetooth package	<p><b>Including:</b>            PET Bluetooth sensor            Batteries            Hammer            4 X replacement hammer heads            100g putty            Carrying case            PET software            Accelerometer calibration certificate            On-line training            3 years warranty.  <b>Note:</b> Computer is NOT included.</p>

## CHUM



The **CHUM (Cross Hole Ultrasonic Monitor)** uses the Crosshole Sonic Logging (CSL) method (ASTM D6760-16) to perform high-resolution quality control on deep foundations.

The system uses an ultrasonic wave sent from an emitter to a receiver while both are pulled through water-filled access tubes embedded in the concrete. The measured arrival time and energy are directly related to concrete quality.

Additional methods supported by the CHUM are Single Hole Ultrasonic Testing (SHUT) and Tomography (two- and three-dimensional).

### Main features:


- Easy to use; The user-friendly software makes it possible to master the CHUM in less than a day. No additional expensive training required
- Powerful tomography features
- Unlike other system based on an embedded computer (which may soon become obsolete), CHUM connects to the USB port of your regular notebook computer or Tablet PC.
- Automatic Gain Control (AGC)
- Standard Relative Energy (RE) display

### The basic CHUM package includes everything required to perform CSL and 2D tomography:

- The CHUM instrument, two ultrasonic transducers, two 50m cable reels, two depth meter pulleys, cables and AC power adapter
- Optional: 100m/150m cable reels, 3D tomography
- Testing, analysis and reporting software
- Interpretation assistance package
- 10 years of free software upgrades
- 3 year warranty on hardware




The **CHUM** system  
(computer not included)

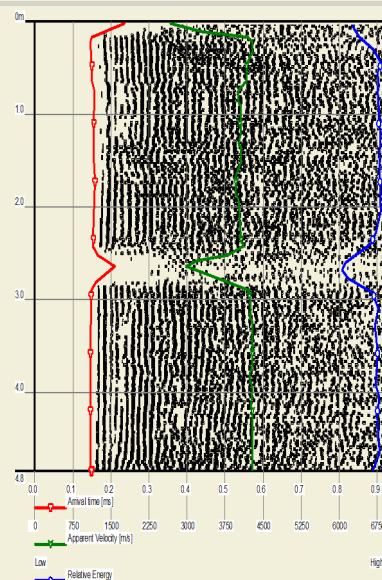

Typical output

3D

tomography is available as a free on-line service for 1 year

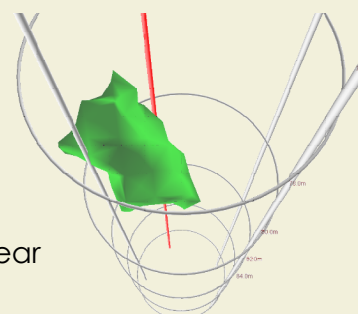

## CHUM 3DT



The CHUM 3DT (3D Tomography software for CHUM) is the most advanced, easiest to use and highly practical 3DT solution available today.

3D Tomography reveals and organizes information about flaws in the piles in a human-readable form and helps making well-informed decisions.



### Main features:

- Easy to use: Wizard-based interface hides the complexity of the calculations.
- Interactive UI—Zoom, rotate, tilt.
- lightning-fast calculations and graphics.
- Vertical and horizontal slices at any depth/direction.
- Immediate velocity threshold selection.
- Wireframe, Opaque and semi-transparent options help visualize the flaws.
- Create a report in a video clip form, in a document form or hand over the free 3DT viewer for anyone to view the results interactively.
- 10 years free software upgrades.



This link demostartes the 3DT in video  
[CHUM 3DT Video](#)

Or search for Piletest on YouTube

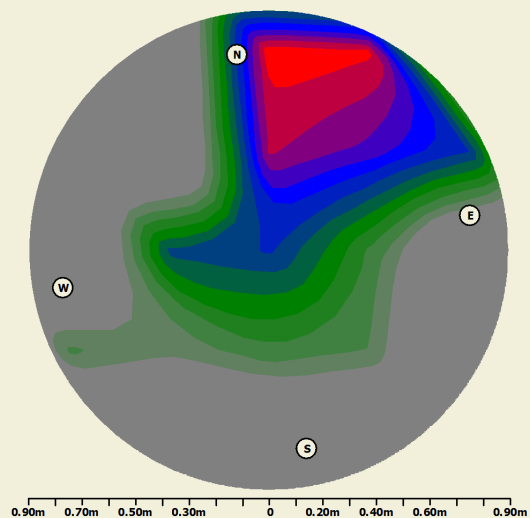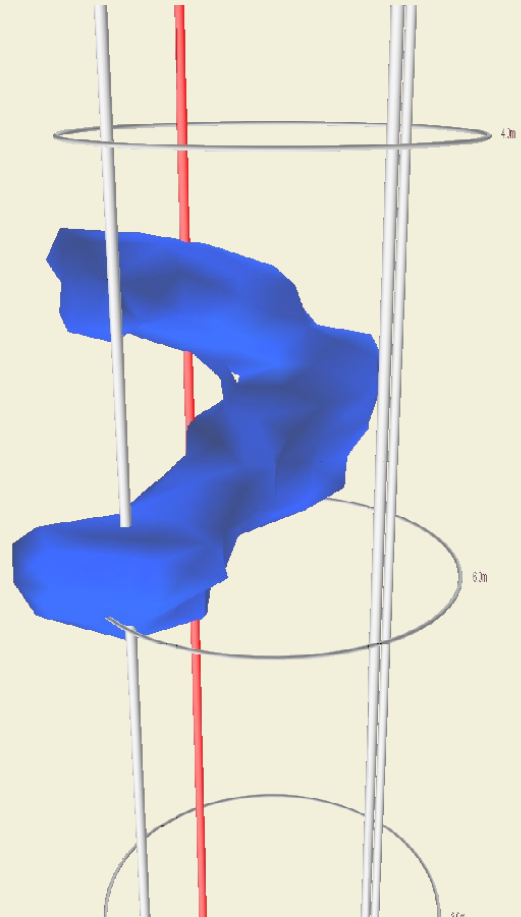

## PSI - Parallel Seismic Instrument

PSI uses the well-known Parallel Seismic method to establish the depth of existing foundations (specifically piles) where the superstructure precludes access to the pile heads.

The test requires the installation of a plastic access tube in parallel, and as close as possible, to the tested pile. The tube should be carried down to a depth exceeding the assumed pile length by a margin of 8-10 m and filled with water. In unsaturated soils the tube should be firmly grouted in the hole to achieve good acoustic coupling with the surrounding soil.

### System Components:

- (1) PSI instrument
- (2) Sledgehammer with a trigger switch
- (3) Digital depth meter
- (4) Hydrophone

\* PSI2 is compliant with AFNOR NF P94-160-3

### Operation:


As the hydrophone is lowered in stages inside the access tube, the superstructure is hit with the hammer and the pulse arriving at the hydrophone is recorded in the PC that is connected to the instrument. When all the pulses thus collected are plotted versus the respective depths, they show a typical break in the slope at the depth where the pile tip is located.

### Advantages:


- Ease of use: It is usually self-taught in less than a day. No additional expensive training is needed.
- Connects to any PC/Laptop via a standard USB port.
- Interpretation assistance and Second Opinion Services (SOS) included.



PSI 2 System Components

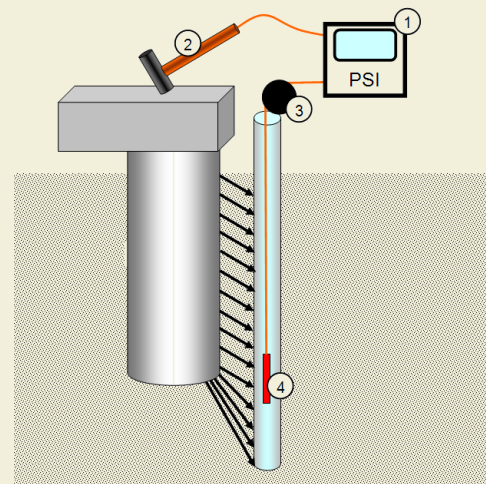

System Components

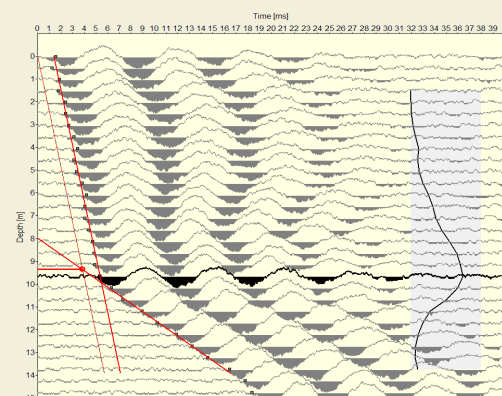

Wave response display

### BIT - Borehole Inclusion Tester



All piling specifications prescribe the allowable deviation of the pile axis from the vertical. Typical limits vary between 1.33% (UK ICE) and 2% (US FHWA). In diaphragm and secant pile walls, the specification is typically more restrictive.

Unlike traditional systems, BIT uses the auger/bucket itself as a centralizer, thus eliminating the need for a bulky system. The BIT enables fast and accurate determination of inclination in both dry and wet boreholes, vertical or raked.

BIT is compliant with the ASTM D8232-18 standard.

Large boreholes and diaphragm-walls may be quickly tested several times during drilling to enable real-time corrective action. [Operation in a Borhole](#)

Finished pile inclination can be measured through the CSL access tubes. [Operation in a Pile](#)


#### System components:

- (1) BIT instrument, microcontroller-driven, with wireless communication to peripherals and durable cable connection to the sensor.
- (2) Sensor including precision bi-axial inclinometer and a gyro, waterproof to 160m.
- (3) Wireless depth encoder.
- (4) Android smart-phone or tablet with software and Bluetooth communication (not included).
- (5) Access-tube adapter / centralizer (optional)

#### Operation:


In the open hole, the inclinometer is rigidly attached to the drill bit (bucket or auger) and the depth encoder hung from the rig. The bucket is then lowered (with minimal axis turning) into the open hole. The descent is stopped at predetermined depths for inclination reading and the deviation calculated in real time by integrating the inclination over depth. When pulling the bucket upwards to the surface, the procedure is repeated. The resulting closure error is distributed over the whole depth.

With the optional access-tube adapter, the BIT can also check the as-made inclination of bored piles.

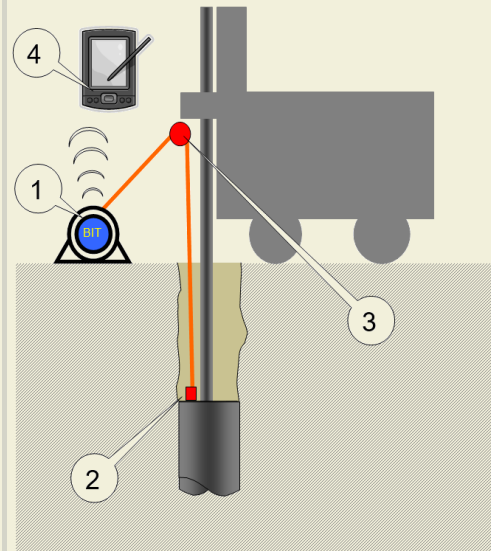

Schematic view

The BIT system with access tube

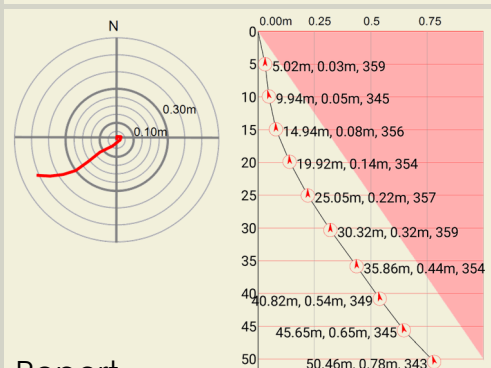

Report.  
Top and side view





Contact Information

Phone: +44 144 278 0919

Email: [sales@piletest.com](mailto:sales@piletest.com)

WEB: [www.piletest.com](http://www.piletest.com)

Address: 18 Fouracres Walk  
Hemel Hempstead  
Herts HP3 9LB  
United Kingdom

File name: Piletest-PET\_2020

